

SOLDERING STATION



STANDARD TIPS FOR THERMOREGULATED STATION

REFERENCE


FOR MICRO IRON 1601 (40W) Special SMD

Ø 3,3mm


P= pitch in mm L=length in mm

LONG LIFE TREATMENT - SUITABLE LEAD FREE


(Sold and packaged batch of 5 pieces)




3616 Screwdriver type P=1,6 / L=15
Code : 1051001030




3603* Cone-shaped type P=0.3 / L=15
Code : 1051001025



3602 Thin Cone-shaped P=0.3 / L=15
Code : 1051001024



3604 Needle type P=0.3 / L=15
Code : 1051001026



3609 Cone-shaped type P=0.9 / L=15
Code : 1051001028


FOR IRON 2501 (50W) "TRADITIONAL"

Ø 5mm

P= pitch in mm L=length in mm

LONG LIFE TREATMENT - SUITABLE LEAD FREE

(Sold and packaged batch of 5 pieces)



2411* Screwdriver type P=1.6 / L=21
Code : 1051001003




2412 Screwdriver type P=2.6 / L=21
Code : 1051001004



2413 Screwdriver type P=3.5 / L=21
Code : 1051001005




2418 Screwdriver type P=4.6 / L=18
Code : 1051001058



2417 Cone-shaped type P=0.5 / L=21
Code : 1051001006

2418 Cone-shaped whistle P=1.8 / L=21
Code : 1051001007

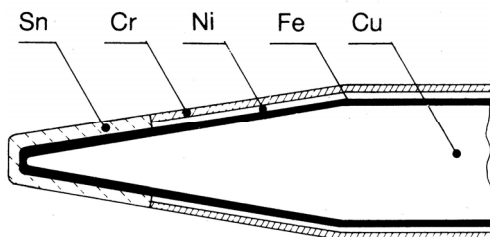

*Original Tip





SOLDERING STATION

STANDARD TIPS FOR THERMOREGULATED STATION




REFERENCE

FOR MICRO IRON 1801/2101 (80W) et (95W) "Special LEADFREE" Ø 5mm

P=pitch in mm L= lenght in mm

LONG LIFE TREATMENT - SUITABLE LEAD FREE (Sold and packaged batch of 5 pieces)



3816 Screwdriver type P=1.6 / L=15
Code : 1051001062

3809 Screwdriver type P=2.6 / L=15
Code : 1051001066

3810 Screwdriver type P=1.0 / L=15
Code : 1051001063



2418 Screwdriver type P=4.6 / L=18
Code : 1051001058



3803* Cone-Shaped type P=0.3 / L=15
Code : 1051001064


3804 Needle type P=0.3 / L=15
Code : 1051001065

FOR IRON 3401 (100W) "TRADITIONAL"

Ø 6mm

P=pitch in mm L= lenght in mm


LONG LIFE TREATMENT - SUITABLE LEAD FREE (Sold and packaged batch of 5 pieces)



850-10DTX* Screwdriver type P=2.6 straight
Code : 1051001041

850-10DTX

850-11CTX Screwdriver type P=2.6 curve
Code : 1051001042



850-11CTX

850-12DTX Screwdriver type P=4.6 straight
Code : 1051001046

850-13DTX Screwdriver type P=1.6 curve
Code : 1051001043


850-15DTX Screwdriver type P=0.8 straight
Code : 1051001045

FOR IRON SOLDER 3501/3601 (100W) and (150W) ("Buffalo"Type)


Ø 8mm

P=pitch in mm L= lenght in mm

LONG LIFE TREATMENT - SUITABLE LEAD FREE



3513 "Buffalo" Type P=3.0 / L=35
Code : 1051001018



3515* "Buffalo" Type P=5.0 / L=35
Code : 1051001019



3518 "Buffalo" Type P=8.0 / L=35
Code : 1051001020

***Original tip**

